

# BIXOLON®

SAMSUNG mini printers



SAMSUNG  
ELECTRO-MECHANICS

# SRP-370/372

TWO-COLOR THERMAL RECEIPT PRINTERS

*A New, Faster One or Two-Color Thermal Receipt Printer For PC or POS Applications*



The Samsung SRP-370 Thermal Receipt Printer prints one-color receipts at 200mm per second and two-color at 90mm per second – more than 60% faster than the leading competition. Accommodates paper up to 4 inches in diameter for fewer paper changes and includes a standard internal buzzer for noisy kitchen printing applications. The SRP-370 features drop and print paper loading and a standard selectable partial or full auto-cutter. Choose from serial, parallel, USB, Ethernet or Bluetooth modular interfaces that can be easily changed without opening the cabinet.

- Drop and Print Paper Loading
- Two-Color Printing
- Fast 61.7 Lines per Second Printing
- Wall Mountable
- Supports Multiple Paper Widths
- Standard Auto Cutter



# Samsung SRP-370/372 Thermal Receipt Printers



## Additional Features

- Fast 200mm per Second Print Speed (One-Color Print)
- Compatible with Competitor's Emulations Including Epson™, Star™, Citizen™
- Saves Installation Space (Compact Size, Wall Mount Option)
- Paper-End Sensor / Near-End Sensor
- Easy To Use Software Utilities: Virtual Memory Switch Manager, Non-Volatile Image Download, Firmware Download

## Specifications

<b>Printer Speed–</b>	
<b>Mono:</b>	200mm per Second / 61.7 Lines per Second
<b>Bar Code:</b>	100mm per Second / 30.9 Lines per Second
<b>2-Color:</b>	90mm per Second / 27.8 Lines per Second
<b>Printing Method:</b>	Direct Thermal
<b>Resolution:</b>	SRP-370 =180 dpi / SRP-372 = 203 dpi
<b>Characters Per Line:</b>	Font A: 42; Font B: 56
<b>Character Size:</b>	Font A: 12 x 24; Font B: 9 x 17
<b>Paper Size:</b>	57.5mm / 79.5mm / 82.5mm x 105mm Max. Diameter
<b>Paper Supply:</b>	Drop and Print
<b>Reliability (MCBF)–</b>	
<b>Printer:</b>	70,000,000 Lines
<b>Auto Cutter:</b>	1,000,000 Cuts
<b>TPH:</b>	150 Km
<b>Character Set:</b>	Alphanumeric: 95 International: 32
<b>Extended Graphic:</b>	128 x 7 Page
<b>Barcode–</b>	
<b>1D:</b>	EAN-13, EAN-8, Code 39, Code 128, ITF, Codabar, UPC-A UPC-E
<b>2D (Option):</b>	PDF417, QR Code
<b>Emulation:</b>	Epson™, Citizen™, Star™
<b>Interface:</b>	Serial, Parallel, USB, Ethernet and Bluetooth
<b>Driver:</b>	WIN 95/98/ME/2000/NT/XP/2003 Server/USB/OPOS
<b>Buzzer:</b>	Internal (Standard)
<b>Drawer Port:</b>	1 Port (Maximum 2 Drawers)
<b>Data Buffer:</b>	64 Kb
<b>Power Supply:</b>	AC 120 ~ 230 V ± 10% Adapter Included
<b>Power Consumption:</b>	Standby: 28.8W; Operating: 55.2W
<b>Operating Temperature:</b>	32° ~ 112°F (0° ~ 45°C)
<b>Operating Humidity:</b>	10% ~ 90% (Non-Condensing)
<b>Dimensions:</b>	5-11/16"W x 7-9/16"L x 5-7/8" H
<b>Options:</b>	Splash Proof Cover Wall Mount Bracket


All product features are subject to change without notice.



Drop and Print Paper Loading



Accommodates Larger Paper Roll

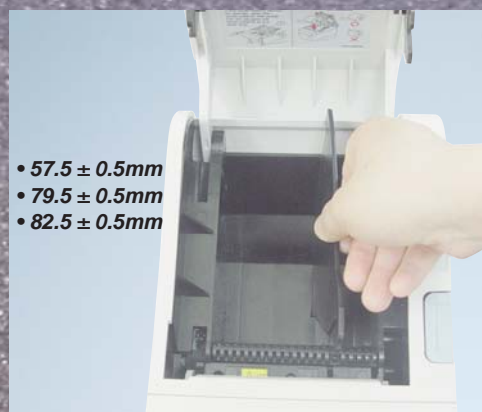

Selectable Paper Width



Easy to Change Interface Modules