

BIXOLON®

SAMSUNG mini printers



SAMSUNG
ELECTRO-MECHANICS

SRP-370/372

TWO-COLOR THERMAL RECEIPT PRINTERS

A New, Faster One or Two-Color Thermal Receipt Printer For PC or POS Applications



The Samsung SRP-370 Thermal Receipt Printer prints one-color receipts at 200mm per second and two-color at 90mm per second – more than 60% faster than the leading competition. Accommodates paper up to 4 inches in diameter for fewer paper changes and includes a standard internal buzzer for noisy kitchen printing applications. The SRP-370 features drop and print paper loading and a standard selectable partial or full auto-cutter. Choose from serial, parallel, USB, Ethernet or Bluetooth modular interfaces that can be easily changed without opening the cabinet.

- Drop and Print Paper Loading
- Two-Color Printing
- Fast 61.7 Lines per Second Printing
- Wall Mountable
- Supports Multiple Paper Widths
- Standard Auto Cutter



Samsung SRP-370/372 Thermal Receipt Printers



Additional Features

- Fast 200mm per Second Print Speed (One-Color Print)
- Compatible with Competitor's Emulations Including Epson™, Star™, Citizen™
- Saves Installation Space (Compact Size, Wall Mount Option)
- Paper-End Sensor / Near-End Sensor
- Easy To Use Software Utilities: Virtual Memory Switch Manager, Non-Volatile Image Download, Firmware Download

Specifications

Printer Speed–	
Mono:	200mm per Second / 61.7 Lines per Second
Bar Code:	100mm per Second / 30.9 Lines per Second
2-Color:	90mm per Second / 27.8 Lines per Second
Printing Method:	Direct Thermal
Resolution:	SRP-370 =180 dpi / SRP-372 = 203 dpi
Characters Per Line:	Font A: 42; Font B: 56
Character Size:	Font A: 12 x 24; Font B: 9 x 17
Paper Size:	57.5mm / 79.5mm / 82.5mm x 105mm Max. Diameter
Paper Supply:	Drop and Print
Reliability (MCBF)–	
Printer:	70,000,000 Lines
Auto Cutter:	1,000,000 Cuts
TPH:	150 Km
Character Set:	Alphanumeric: 95 International: 32
Extended Graphic:	128 x 7 Page
Barcode–	
1D:	EAN-13, EAN-8, Code 39, Code 128, ITF, Codabar, UPC-A UPC-E
2D (Option):	PDF417, QR Code
Emulation:	Epson™, Citizen™, Star™
Interface:	Serial, Parallel, USB, Ethernet and Bluetooth
Driver:	WIN 95/98/ME/2000/NT/XP/2003 Server/USB/OPOS
Buzzer:	Internal (Standard)
Drawer Port:	1 Port (Maximum 2 Drawers)
Data Buffer:	64 Kb
Power Supply:	AC 120 ~ 230 V ± 10% Adapter Included
Power Consumption:	Standby: 28.8W; Operating: 55.2W
Operating Temperature:	32° ~ 112°F (0° ~ 45°C)
Operating Humidity:	10% ~ 90% (Non-Condensing)
Dimensions:	5-11/16"W x 7-9/16"L x 5-7/8" H
Options:	Splash Proof Cover Wall Mount Bracket


All product features are subject to change without notice.



Drop and Print Paper Loading



Accommodates Larger Paper Roll

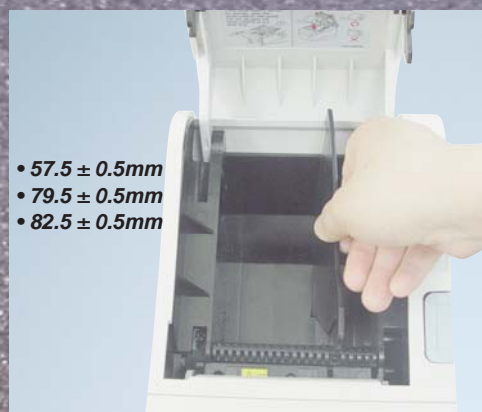

- 57.5 ± 0.5mm
- 79.5 ± 0.5mm
- 82.5 ± 0.5mm

Selectable Paper Width



Easy to Change Interface Modules